


# EXTENDED routing for DV4mini

1

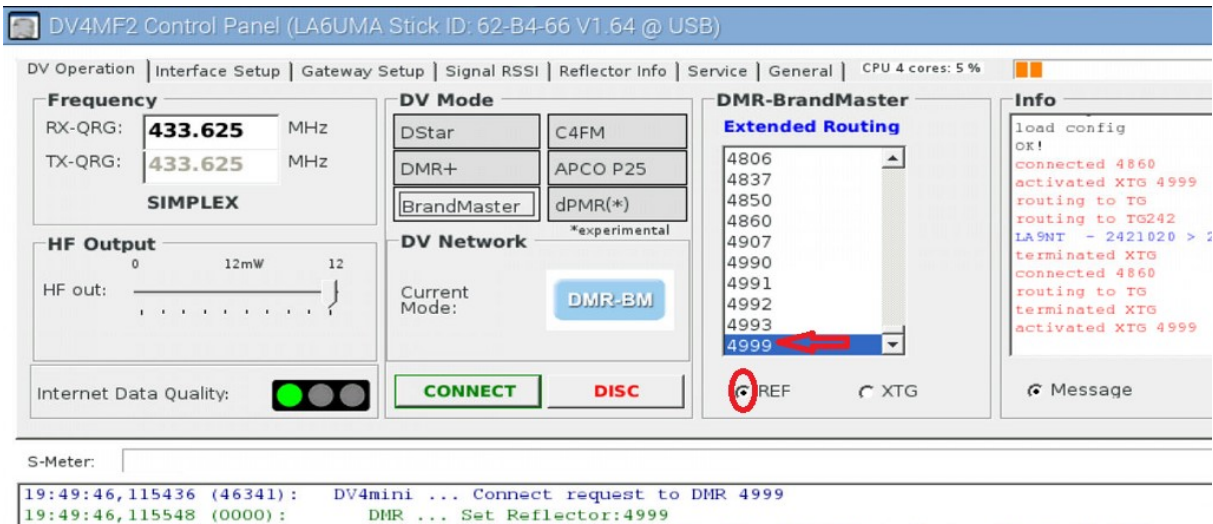

DV4MF2 Control Panel (LA6UMA Stick ID: 62-B4-66 V1.64 @ USB)

DV Operation | Interface Setup | Gateway Setup | Signal RSSI | Reflector Info | Service | General | CPU 4 cores: 5%

**Frequency**  
RX-QRG: 433.625 MHz  
TX-QRG: 433.625 MHz  
SIMPLEX

**HF Output**  
0 12mW 12  
HF out: [Slider]

**DV Mode**  
DStar C4FM  
DMR+ APCO P25  
BrandMaster dPMR(\*)  
\*experimental

**DV Network**  
Current Mode: DMR-BM  
CONNECT DISC

**DMR-BrandMaster**  
Extended Routing  
4806  
4837  
4850  
4860  
4907  
4990  
4991  
4992  
4993  
4999 (highlighted with red arrow)


**Info**  
load config OK!  
connected 4860  
activated XTG 4999  
routing to TG  
routing to TG242  
LA9NT - 2421020 >  
terminated XTG  
connected 4860  
routing to TG  
terminated XTG  
activated XTG 4999

S-Meter: [Progress bar]

```
19:49:46,115436 (46341): DV4mini ... Connect request to DMR 4999
19:49:46,115548 (0000): DMR ... Set Reflector:4999
```

I ControlCenterDV4M/ DV4MF2 kobler du deg til reflector 4999

2

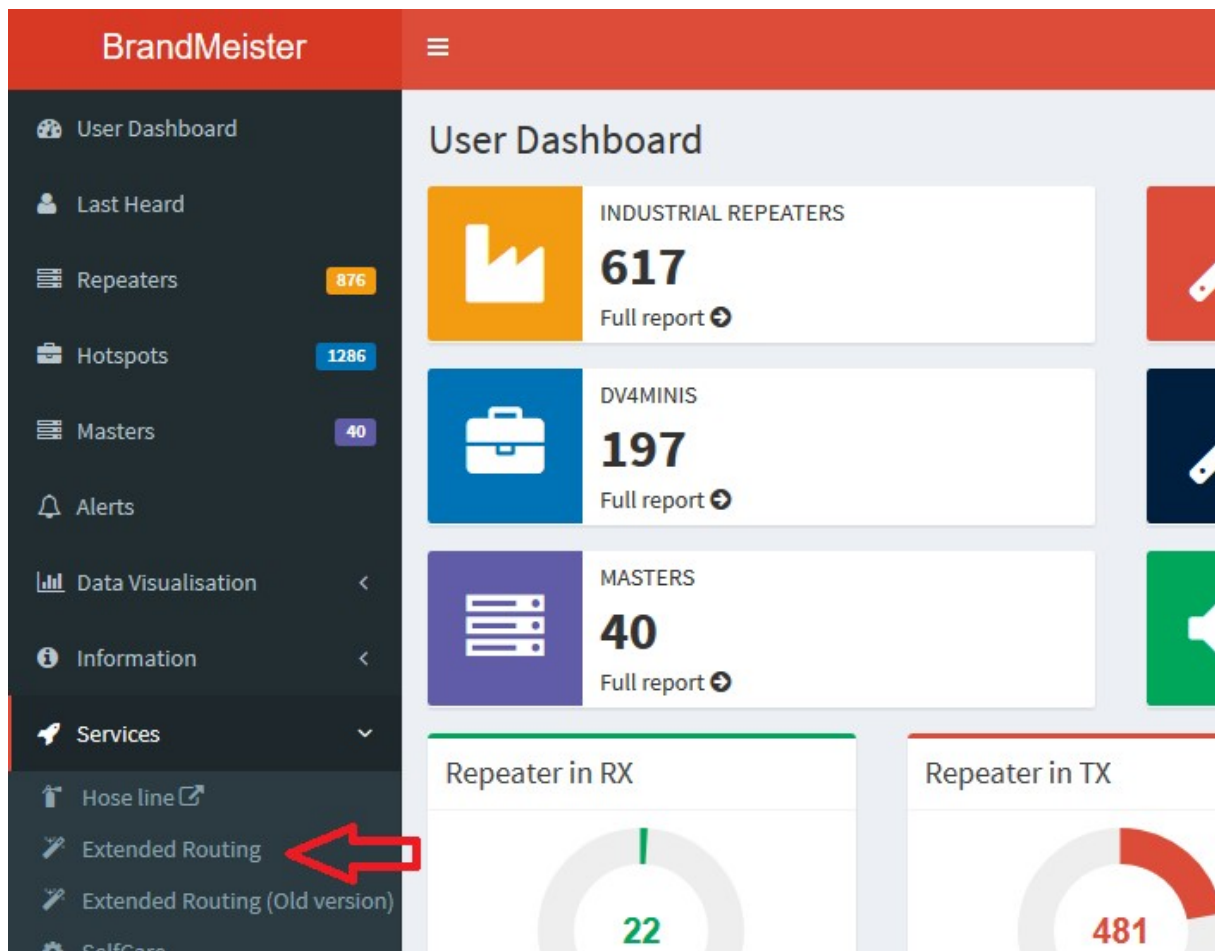

**BrandMeister**

User Dashboard

- INDUSTRIAL REPEATERS: 617 (Full report)
- DV4MINIS: 197 (Full report)
- MASTERS: 40 (Full report)

Repeater in RX: 22


Repeater in TX: 481

Services menu items:  
Hose line  
Extended Routing (highlighted with red arrow)  
Extended Routing (Old version)  
SelfCare

Gå til <https://brandmeister.network/?page=xtg>

Trykk på "Extended Routing" – Dersom du ikke har registrert deg, se neste punkt.


### 3

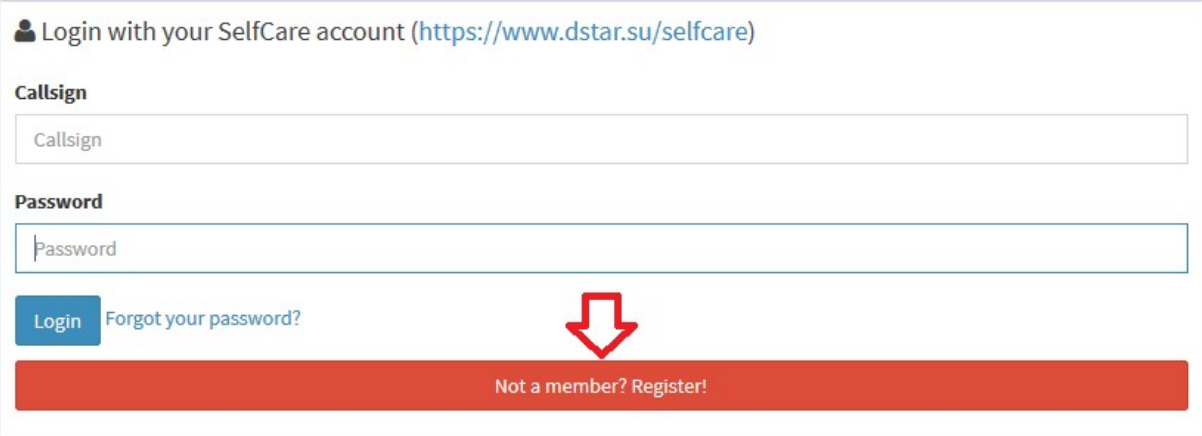 Login with your SelfCare account (<https://www.dstar.su/selfcare>)

**Callsign**

**Password**

[Forgot your password?](#)



Not a member? Register!

Login med Callsign og Password, eller trykk på "Not a member? Register!" dersom du ikke er registrert.

Extended Routing User Dashboard - Services - Extended Routing

Extended Routing for DV4mini

**User ID**  
 Choose dongle

**Type a Mapped group (TalkGroup) ID** 
Or select one from the list

For help about this please check the wiki: [Extended Routing for DV4mini](#)

Når du kommer videre kommer dette bildet opp.

Extended Routing User Dashboard - Services - Extended Routing

Extended Routing for DV4mini

**User ID**

**Type a Mapped group (TalkGroup) ID** 
Or select one from the list

For help about this please check the wiki: [Extended Routing for DV4mini](#)

Dersom du har registrert deg riktig kan du velge din CCS7 i fra "User ID" fra rullgardinmenyen. Velg deretter hvilken talegruppe du vil kobles til i "Type a Mapped Group (TalkGroup) ID. I dette tilfelle TG 24201 - National casual/ragchew. Avslutt med "save settings" og du vil få en bekreftelse i form av en grønn linje øverst i bildet "Saved". DV4mini er nå rutet mot TG 24201.

Se de forskjellige talegruppene her: <https://wiki.brandmeister.network/index.php/Norway#TS1>  
 Engelsk manual: [https://wiki.brandmeister.network/index.php/Extended\\_routing\\_for\\_DV4mini](https://wiki.brandmeister.network/index.php/Extended_routing_for_DV4mini)